



Our standard models are available with dimensions of 200x400mm (7,87 inch x 15,75 inch) or 200x800mm (7,87 inch x 31,50 inch) and are produced with the openings you require.

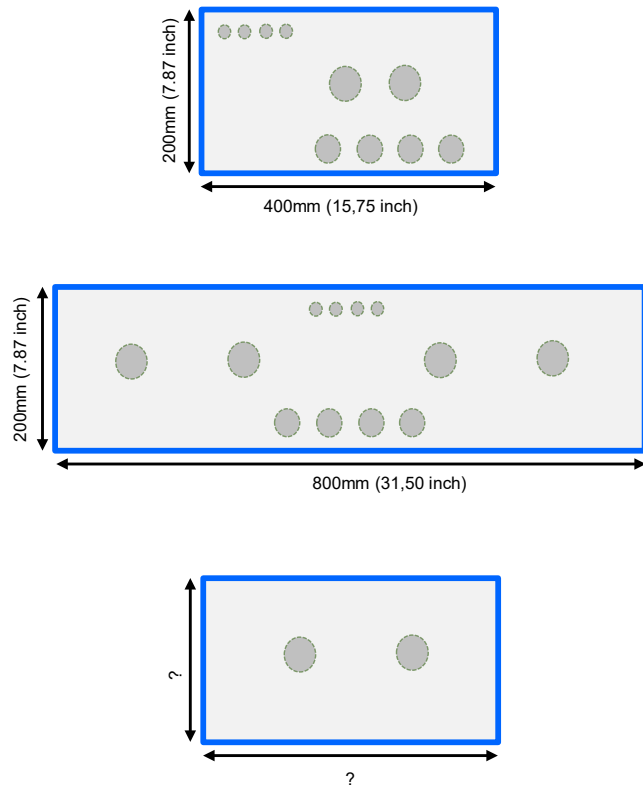

If you need other dimensions,
talk to us and
we will find a solution!

Components of the BOS system line

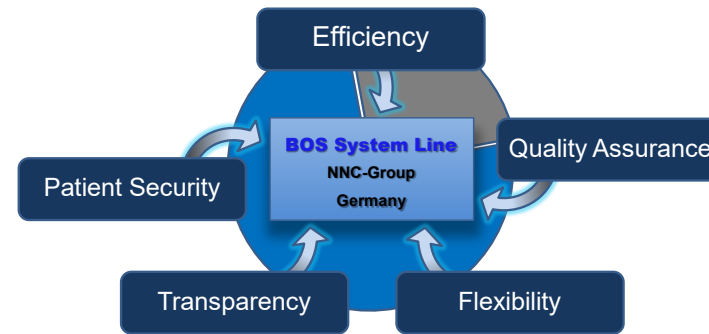

Contact:

NNC-LIN MS GmbH

Research & Development / Distribution
Am Kleinbahnhof 18-30 - 25746 Heide
Administration
Uhlenstroot 3 - 25797 Wöhrden

Phone: +49 (0) 481 817 877 65

+49 (0) 4839 865 99 82


Fax: +49 (0) 4839 865 99 81

Email: info@nnc-lin.com

www.nnc-lin.com

Flexibility has a name

Biological Organisation Systems

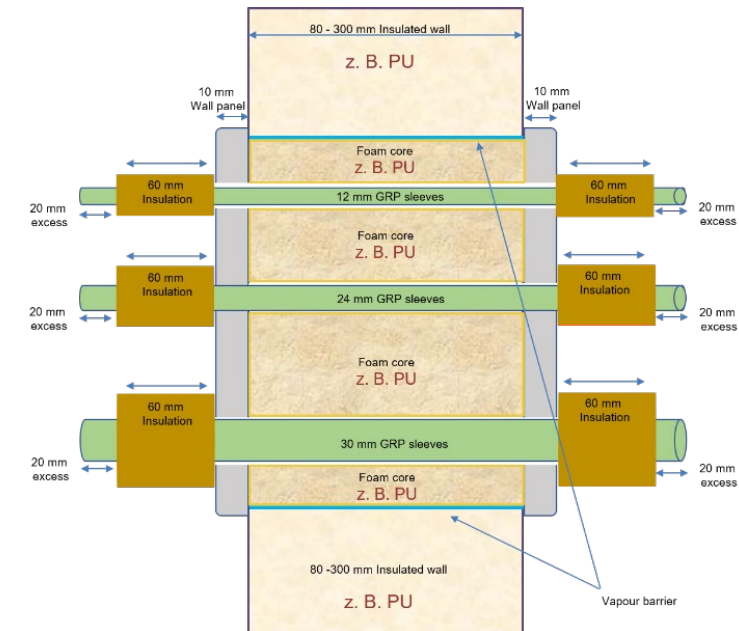

Thermoblock

BOS Thermoblock for pipes, electrical and data cables through insulated walls in cold rooms
"Highly efficient thermal protection passage"

BOS Thermoblock

Trademark protected (IPC: F16L 5/02 – Nr.20 2020 101 452)

The highly efficient thermal protection passage for cold rooms



How do you lay your pipes and other lines in cold storage rooms today?
protected / unprotected

The damage caused by unsuitable wall duct in cold rooms is enormous.

In addition, the effort for maintenance, replacement and expansion is very high. The most common problems are:

- Attenuation of the walls by condensation
- This results in a loss of insulation efficiency
- Corrosion from condensation
- Subsequent installation of lines is not possible
- Subsequent laying of pipelines is not possible

With one component, all these problems are a thing of the past.

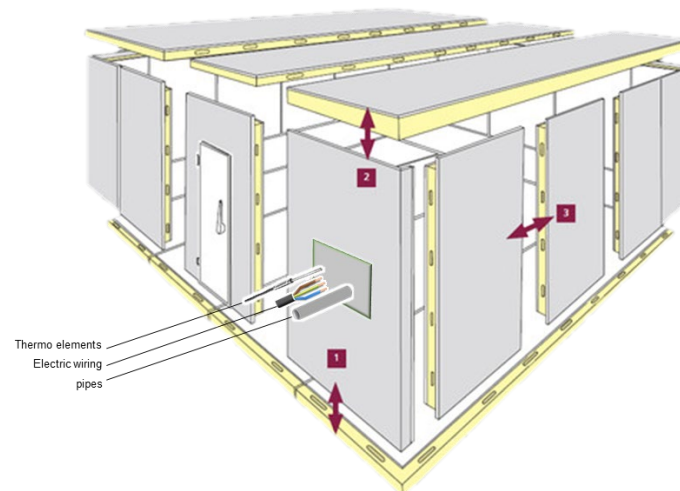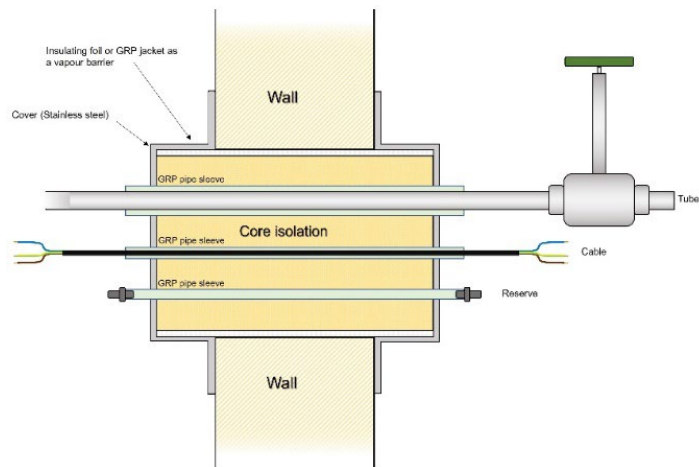

BOS Thermoblock

Trademark protected (IPC: F16L 5/02 – Nr.20 2020 101 452)

